


- High Temperature and Low Light Performance
- 5-Year Limited Product Warranty
- Limited Power Output Warranty:
92% at 10 years, 84% at 20 years, 80% at 25 years (of minimum power)
- Quick-Connect Terminals and Adhesive Backing
- Bypass Diodes for Shadow Tolerance

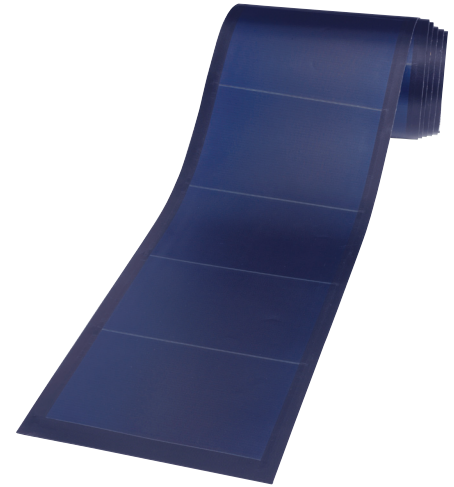


Performance Characteristics


Rated Power (P_{max}): 144 Wp
Production P_{max} Tolerance: $\pm 5\%$

Construction Characteristics

Dimensions: Length: 5486 mm (216"), Width: 394 mm (15.5"), Depth: 4 mm (0.2"),
16 mm (0.6") including potted terminal housing assembly
Weight: 7.7 kg (17.0 lbs)
Output Cables: 4 mm² (12 AWG) cable with weatherproof DC-rated quick-connect terminals
560 mm (22") length
Bypass Diodes: Connected across every solar cell
Encapsulation: Durable ETFE high light-transmissive polymer
Adhesive: Ethylene propylene copolymer adhesive sealant with microbial inhibitor
Cell Type: 22 triple junction amorphous silicon solar cells 356 mm x 239 mm
(14" x 9.4") connected in series

Qualifications and Safety

 UL 1703 Listed by Underwriters Laboratories for electrical and fire safety (Class A Max. Slope 2/12, Class B Max. Slope 3/12, Class C Unlimited Slope fire ratings) for use in systems up to 600 VDC.

 IEC 61646 and IEC 61730 certified by TÜV Rheinland for use in systems up to 1000 VDC.

Laminate Standard Configuration

Photovoltaic laminate with potted terminal housing assembly with output cables and quick-connect terminals on top.

Application Criteria*

- Installation temperature between 10 °C - 40 °C (50 °F - 100 °F)
- Maximum roof temperature: 85 °C (185 °F)
- Minimum slope: 3° (1/2:12)
- Maximum slope: 60° (21:12)
- Approved substrates include certain membrane and metal roofing products.
See United Solar for details.

*Detailed installation requirements are specified in United Solar's installation manuals.



Flexible



Lightweight



Durable




No-Glass



Shadow Tolerant



More kWh





High Temp Performance



Low Light Performance

IV Curves at various Levels of Irradiance at
 Air Mass 1.5 and 25 °C Cell Temperature

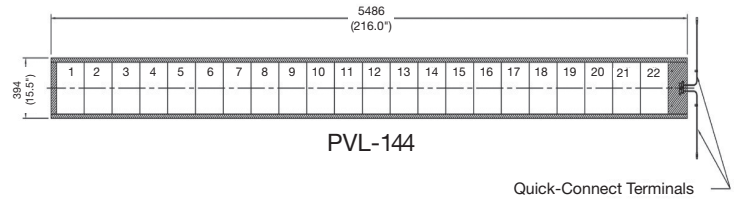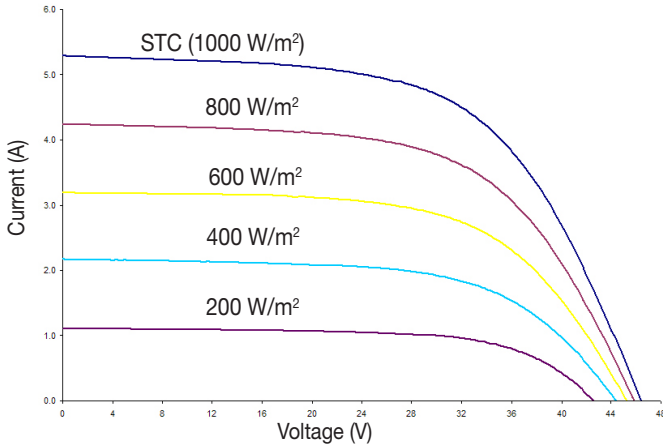

All measurements in mm
 Inches in parentheses
 Tolerances: Length: ± 5 mm (1/4"), Width: ± 3 mm (1/8")

Electrical Specifications

STC
 (Standard Test Conditions)
 (1000 W/m², AM 1.5, 25 °C Cell Temperature)

Maximum Power (P_{max}): 144 W
 Voltage at Pmax (V_{mpp}): 33.0 V
 Current at Pmax (I_{mpp}): 4.36 A
 Short-circuit Current (I_{sc}): 5.3 A
 Open-circuit Voltage (V_{oc}): 46.2 V
 Maximum Series Fuse Rating: 10 A (UL), 8 A (IEC)

NOCT
 (Nominal Operating Cell Temperature)
 (800 W/m², AM 1.5, 1 m/sec. wind)

Maximum Power (P_{max}): 111 W
 Voltage at Pmax (V_{mpp}): 30.8 V
 Current at Pmax (I_{mpp}): 3.6 A
 Short-circuit Current (I_{sc}): 4.3 A
 Open-circuit Voltage (V_{oc}): 42.2 V
 NOCT: 46 °C

Temperature Coefficients
 (at AM 1.5, 1000 W/m² irradiance)

Temperature Coefficient (TC) of I_{sc}: 0.001/°K (0.10%/°C)
 Temperature Coefficient (TC) of V_{oc}: -0.0038/°K (-0.38%/°C)
 Temperature Coefficient (TC) of P_{max}: -0.0021/°K (-0.21%/°C)
 Temperature Coefficient (TC) of I_{mpp}: 0.001/°K (0.10%/°C)
 Temperature Coefficient (TC) of V_{mpp}: -0.0031/°K (-0.31%/°C)
 $y = y_{reference} \cdot [1 + TC \cdot (T - T_{reference})]$

- Notes:
- During the first 8-10 weeks of operation, electrical output exceeds specified ratings. Power output may be higher by 15%, operating voltage may be higher by 11% and operating current may be higher by 4%.
 - Production tolerance for P_{max} at standard test conditions (STC) is +/-5% and for other electrical parameters is +/-10%. Electrical specifications are based on measurements performed at standard test conditions of 1000 W/m² irradiance, Air Mass 1.5, and cell temperature of 25 °C after stabilization.
 - Actual performance may vary up to 10% from rated power due to low temperature operation, spectral and other related effects. Maximum system open-circuit voltage not to exceed 600 VDC per UL, 1000 VDC per IEC regulations.
 - Specifications subject to change without notice.

Global Headquarters
 United Solar Ovonic LLC
 3800 Lapeer Road
 Auburn Hills, MI 48326
 Tel: +1.248.293.0440
 Fax: +1.248.364.5678
 Toll Free (USA): +1.800.528.0617
 info@uni-solar.com

European Headquarters
 United Solar Ovonic
 Europe SAS
 Tour Albert 1er
 65, avenue de Colmar
 92507 Rueil-Malmaison Cedex
 Tel: +33.1.74.70.46.24
 Fax: +33.1.41.39.00.22
 franceinfo@uni-solar.com

German Office
 United Solar Ovonic
 Europe GmbH
 Robert-Koch-Strasse 50
 55129 Mainz
 Tel: +49.6131.240.40.400
 Fax: +49.6131.240.40.499
 europeinfo@uni-solar.com

Italian Office
 United Solar Ovonic Italy Srl
 Via Monte Baldo, 14F
 37069 Villafranca (VR)
 Tel: +39.045.86.00.982
 Fax: +39.045.86.17.738
 italyinfo@uni-solar.com

Spanish Office
 United Solar Ovonic
 Europe GmbH
 Sucursal Spain
 C/ Llull, 321-329
 08019 Barcelona
 Tel: +34.935.530.752
 Fax: +34.935.530.753
 spaininfo@uni-solar.com

www.uni-solar.com
 A subsidiary of Energy
 Conversion Devices, Inc.
 (Nasdaq: ENER)

Your UNI-SOLAR® Distributor:

(800) 967-6917
 www.dcpower-systems.com

800.822.4041
 www.solardepot.com